

ATTACCHI PER MANDRINI PORTAPUNTE DIN 238


Acciaio cementato, temprato e rettificato

TAPER DRILL CHUCK DIN 238

*Cemented, hardened
and grinded steel*



Attacco DIN <i>DIN chuck</i>	cono morse <i>morse taper</i>	dimensioni mm / <i>dimensions mm</i>				
		d_1	d_2	L_1	L_2	L_3
B10	1	10,094	9,4	83	65,5	14,5
B10	2	10,094	9,4	105	80,0	14,5
B12	1	12,065	11,1	89	65,5	18,5
B12	2	12,065	11,1	106	80,0	18,5
B16	1	15,733	14,5	99	65,5	24,0
B16	2	15,733	14,5	112	80,0	24,0
B16	3	15,733	14,5	134	99,0	24,0
B18	1	17,780	16,2	99	65,5	32,0
B18	2	17,780	16,2	119	80,0	32,0
B18	3	17,780	16,2	140	99,0	32,0
B22	2	21,793	19,8	130	80,0	40,5
B22	3	21,793	19,8	147	99,0	40,5

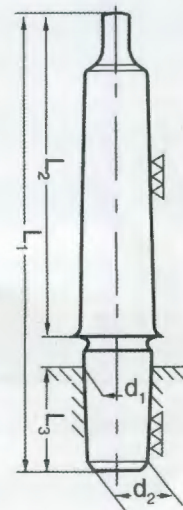

Art. 0140