

Punte Cilindriche



HSS

Codice:

114 025 1

Serie Extra Corta
DIN 1897

Caratteristiche

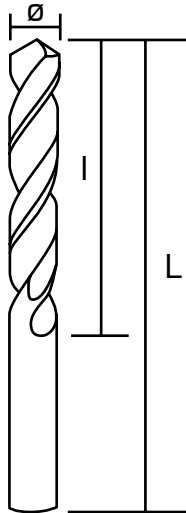

Mat. da Lavorare



Ø mm	L mm	l mm	Ø mm	L mm	l mm	Ø mm	L mm	l mm	Ø mm	L mm	l mm
1,00	26	6	3,60	52	20	6,20	70	31			
1,10	28	7	3,70	52	20	6,25	70	31			
1,20	30	8	3,75	52	20	6,30	70	31			
1,25	30	8	3,80	55	22	6,40	70	31			
1,30	30	8	3,90	55	22	6,50	70	31			
1,40	32	9	4,00	55	22	6,60	70	31			
1,50	32	9	4,10	55	22	6,70	70	31			
1,60	34	10	4,20	55	22	6,75	74	34			
1,70	36	11	4,25	55	22	6,80	74	34			
1,75	36	11	4,30	58	24	6,90	74	34			
1,80	36	11	4,40	58	24	7,00	74	34			
1,90	36	11	4,50	58	24	7,20	74	34			
2,00	38	12	4,60	58	24	7,50	74	34			
2,10	38	12	4,70	58	24	7,80	79	37			
2,20	40	13	4,75	58	24	8,00	79	37			
2,25	40	13	4,80	62	26	8,20	79	37			
2,30	40	13	4,90	62	26	8,50	79	37			
2,40	43	14	5,00	62	26	8,80	84	40			
2,50	43	14	5,10	62	26	9,00	84	40			
2,60	43	14	5,20	62	26	9,50	84	40			
2,70	46	16	5,25	62	26	10,00	89	43			
2,75	46	16	5,30	62	26	10,50	89	43			
2,80	46	16	5,40	66	28	11,00	95	47			
2,90	46	16	5,50	66	28	11,50	95	47			
3,00	46	16	5,60	66	28	12,00	102	51			
3,10	49	18	5,70	66	28	12,50	102	51			
3,20	49	18	5,75	66	28	13,00	102	51			
3,25	49	18	5,80	66	28						
3,30	49	18	5,90	66	28						
3,40	52	20	6,00	66	28						
3,50	52	20	6,10	70	31						