




MASCHIO A MACCHINA HSS DIN  
GUN.



Filettatura a macchina multiapplicazione.  
Comfort e precisione.

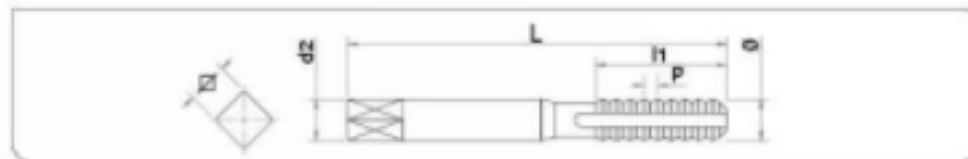

Acciai per trattamento termico  
200-700N/mm<sup>2</sup>



Acciai per trattamento termico  
<950N/mm<sup>2</sup>



Acciai inossidabili austenitici



Ghisa



Leghe di alluminio



Plastiche composite

960 202	EAN	Ø	P	L	I	d2	DIN	QTY	PCB
960202100200040	8420609297991	M2	0,4	45	10	2,8	371	1	1
960202100250045	8420609298004	M2,5	0,45	50	10	2,8	371	1	1
960202100300050	8420609298028	M3	0,5	56	7	3,5	371	1	1
960202100350060	8420609298035	M3,5	0,6	56	8,4	4	371	1	1
960202100400070	8420609298066	M4	0,7	63	10	4,5	371	1	1
960202100500080	8420609298110	M5	0,8	70	11,2	6	371	1	1
960202100600100	8420609298158	M6	1	80	14	6	371	1	1
960202100700100	8420609298172	M7	1	80	14	7	371	1	1
960202100800125	8420609298202	M8	1,25	90	17,5	8	371	1	1
960202100900125	8420609298226	M9	1,25	90	17,5	8	371	1	1
960202101000150	8420609298264	M10	1,5	100	21	10	371	1	1

960 202	EAN	Ø	P	L	I	d2	DIN	QTY	PCB
960202100400050	8420609298059	MF4	0,5	63	10	4,5	371	1	1
960202100500050	8420609298097	MF5	0,5	70	11,2	6	371	1	1
960202100600075	8420609298141	MF6	0,75	80	14	6	371	1	1
960202100800075	8420609298189	MF8	0,75	90	17,5	8	371	1	1
960202100800100	8420609298196	MF8	1	90	17,5	8	371	1	1
960202101000100	8420609298240	MF10	1	90	21	10	371	1	1
960202101000125	8420609298257	MF10	1,25	100	21	10	371	1	1

